

CATALOG

Folding and Self-Return Elevator Seats

Protected by the Industrial Property Office

👍 **CERTIFIED**

👍 **200 KG CAPACITY**

👍 **STANDARDS**

👍 **ČSN EN 81-70**

👍 **EN 81-70 : 2018**

👍 **ČSN 73 4001**



REMING Ltd.

Kytnerova 18, Brno
Czech Republic
info@reming.cz

WWW.REMING.CZ

CONTENTS

About Us	3
Manual Folding Seats	4
• Model 1	5
• Model 2	6
• Model 3	7
• Model 4	8
• Model 5	9
• Model 6	10
• Model 7	11
Self-Return Seats	12
• Model 1	13
• Model 2	14
• Model 3	15
• Model 4	16
• Model 6	17
• Model 7	18
Seat Options and Customization	19
• Seats with Integrated Handles	20
• Seats for Mobile Suspension Systems	21
• Powder-Coated Seats	22
• Antivandal Seats	23
Certificates	24
• Certificate	25
• Technical Approval Certificate	26
• Seat Specifications	27

ABOUT US

REMING is a Czech manufacturer of certified stainless steel folding and self-return elevator seats with more than 20 years of experience in development and production.

Our seats combine safety, durability, functionality and modern design. They are based on our own development and an original construction protected against unauthorized copying.

We currently offer 13 model variants including manual folding seats, self-return seats, antivandal seats and seats for mobile suspension systems. All seats are certified for a load capacity of 200 kg and comply with ČSN EN 81-70, EN 81-70:2018 and ČSN 73 4001 standards.

Every year, we supply more than 1,000 seats to companies in the Czech Republic and abroad, including leading elevator industry brands such as KONE, OTIS, SCHINDLER and TK ELEVATOR.

If you are interested in our products, we will be happy to help you find the right solution for your projects and prepare individual cooperation terms according to your requirements.

Our seats comply with the following standards:

ČSN EN 81-70, EN 81-70:2018, ČSN 73 4001

Available Seat Models:



- Recessed Seat
- Antivandal Seats
- Self-Return Seats
- Manual Folding Seats
- Seats in Custom Colors
- Seats with Integrated Handles
- Seats for Mobile Suspension Systems

Our company is a member of the Czech Elevator Industry Association

Manual Folding Seats

Model 1 – Manual Folding Seat



IP Protected

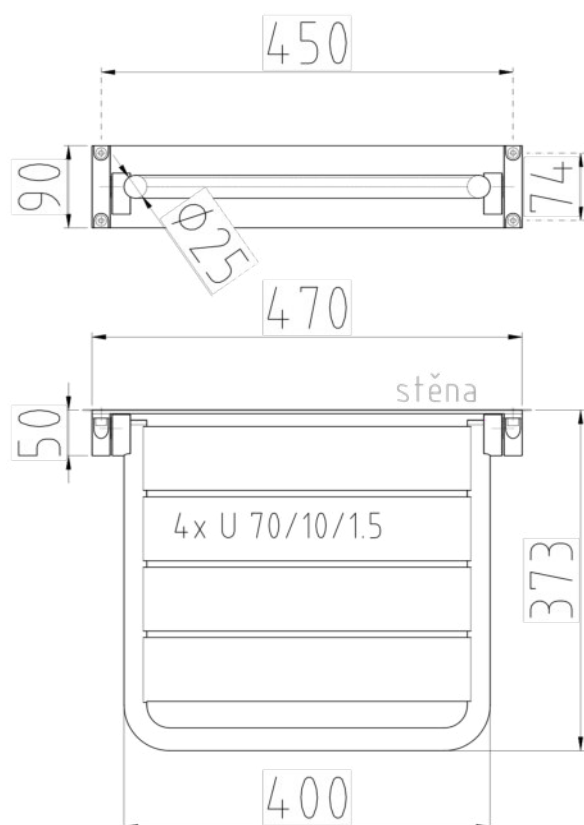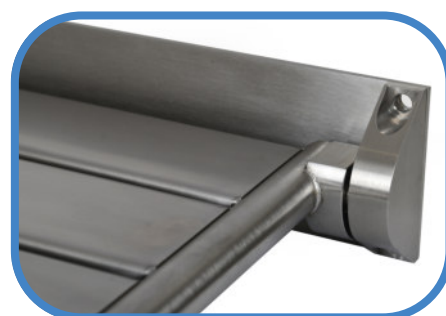

Stainless Steel 1.4301	
Certified Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 373 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Manual

Model 2 – Manual Folding Seat


IP Protected

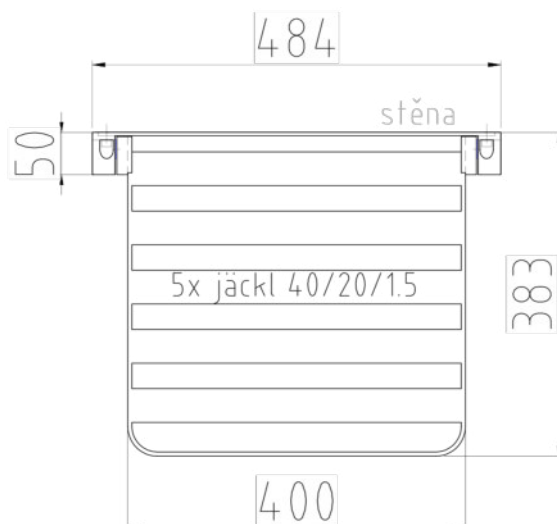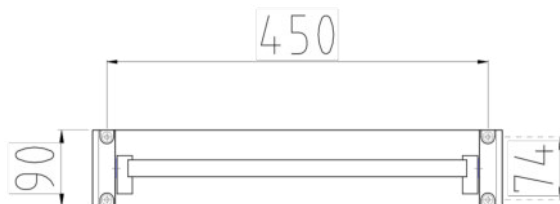

Stainless Steel 1.4301	
Certified Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 383 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Manual

Model 3 – Manual Folding Seat



IP Protected

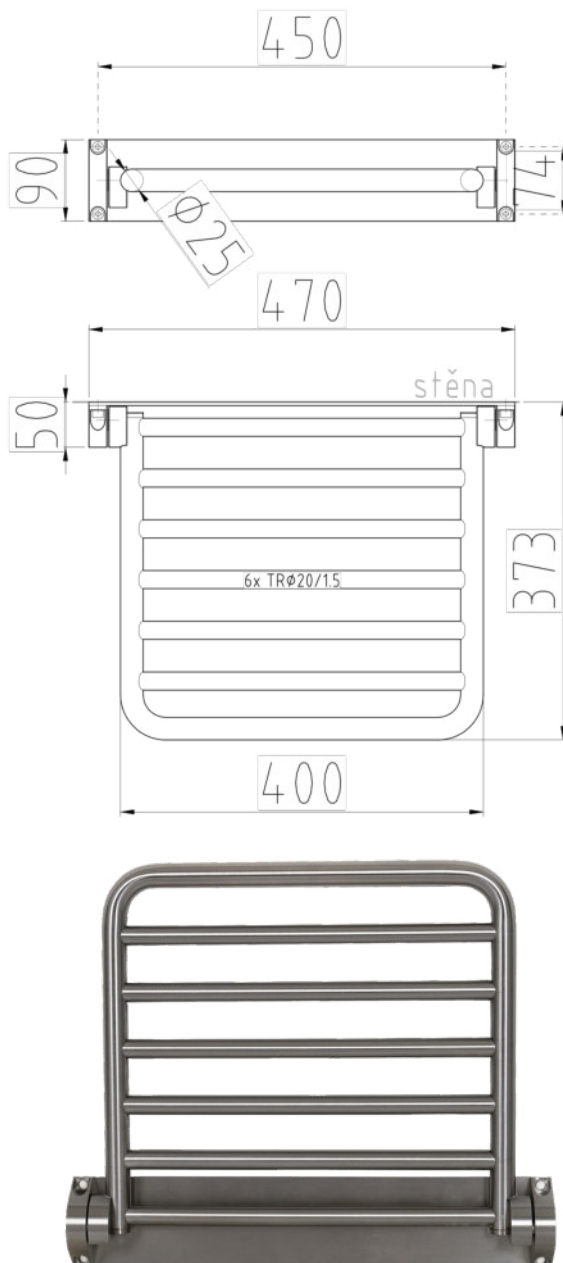

Stainless Steel 1.4301	
Certified Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 373 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Manual

Model 4 – Manual Folding Seat

IP Protected

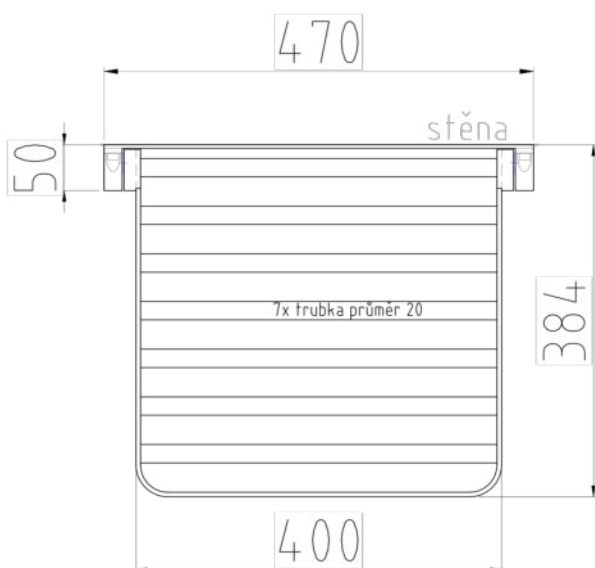
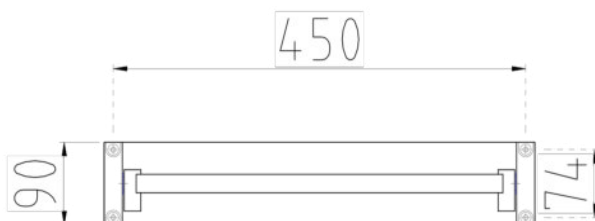


Stainless Steel 1.4301	
Certified Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 384 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Manual

Model 5 – Manual Folding Seat





IP Protected

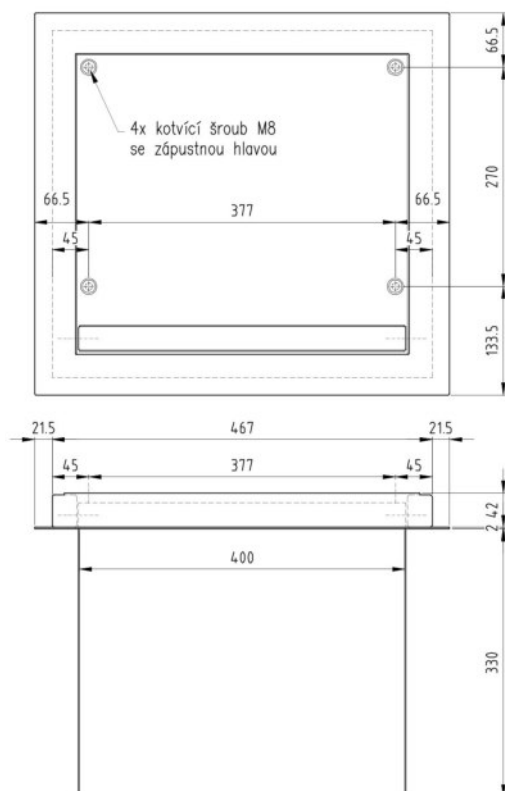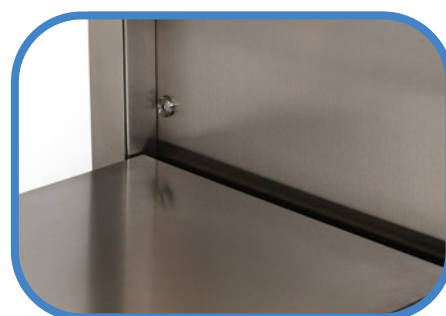

Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 330 mm
Weight	18 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Note	Integrated steel mounting pocket
Folding Type	Manual, Recessed

Model 6 – Manual Folding Seat



IP Protected

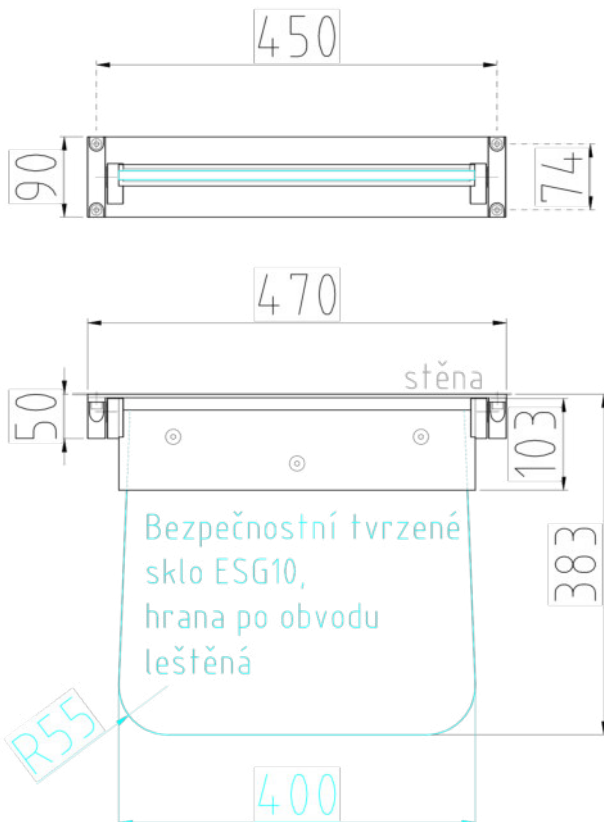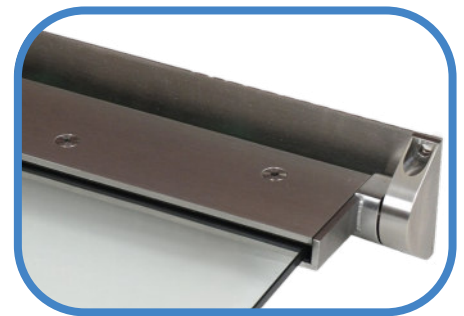

Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 383 mm
Weight	9 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Manual
Glass	Tempered safety glass ESG 10, clear or frosted, with polished edges.

Model 7 – Manual Folding Seat

IP Protected

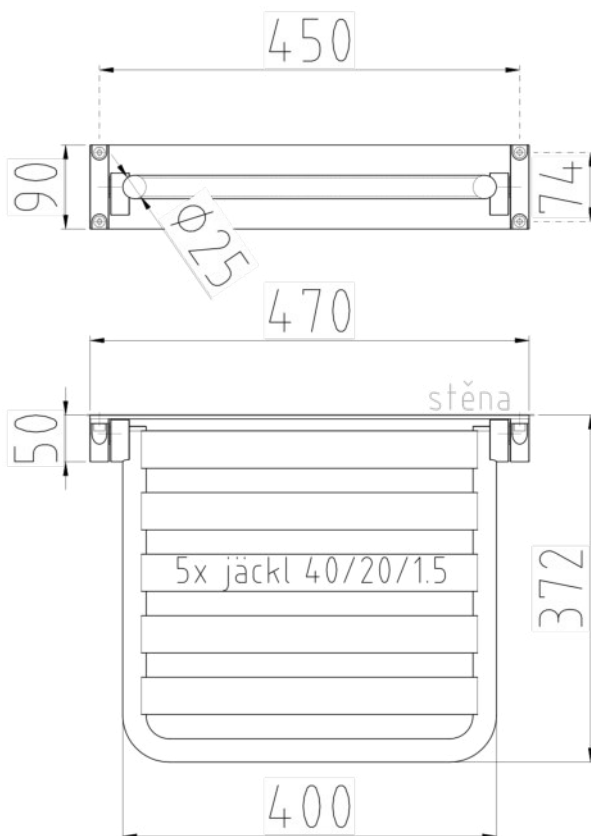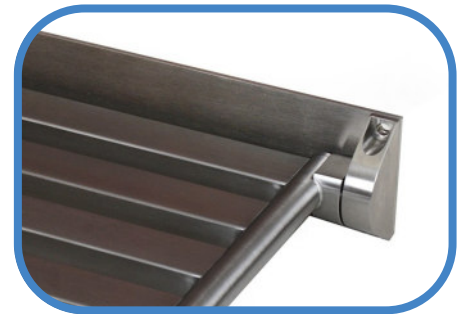



Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 372 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Manual

Self-Return Seats

ČSN 73 4001

Model 1 – Self-Return Seat



IP Protected

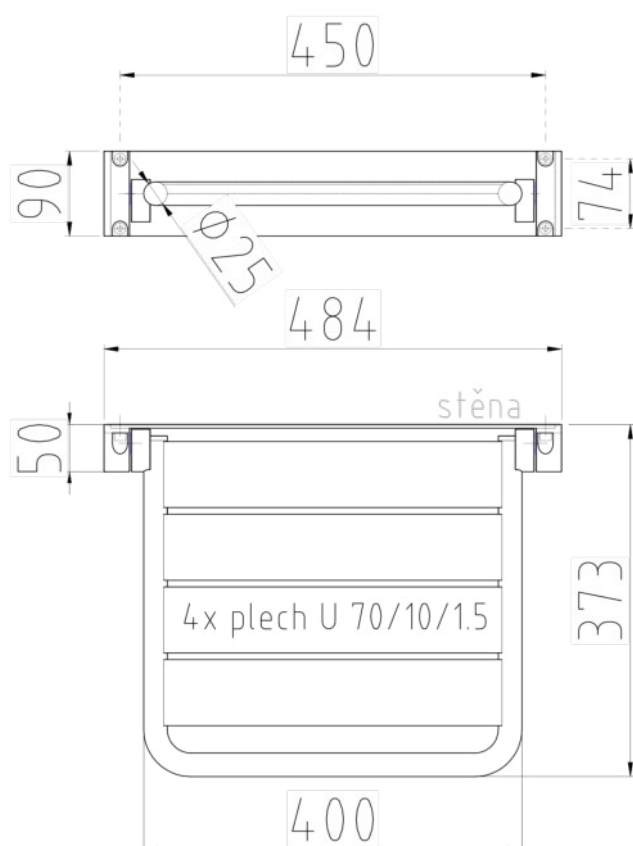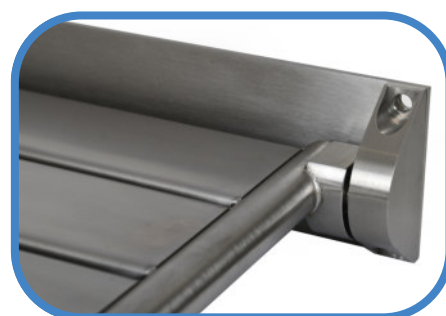

Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 373 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Self-Return

Model 2 – Self-Return Seat


IP Protected

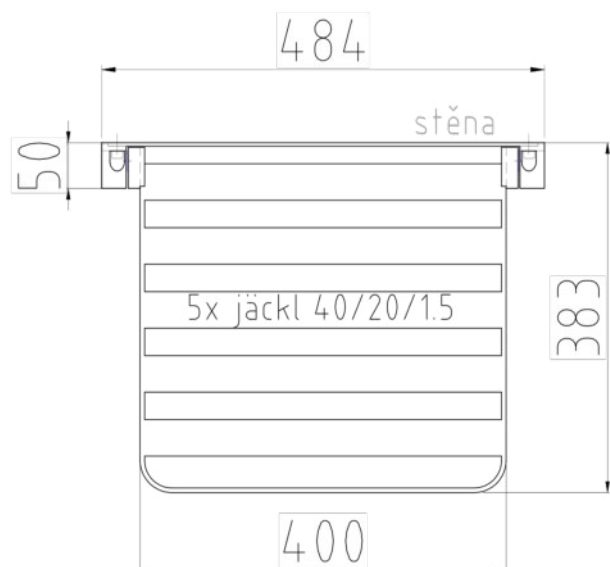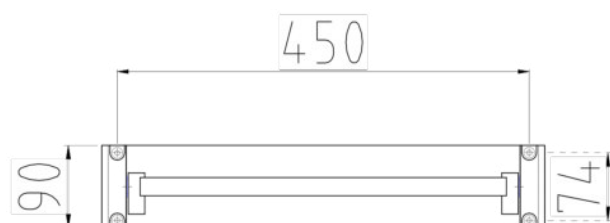

Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 383 mm
Weight	7 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Self-Return

Model 3 – Self-Return Seat



IP Protected

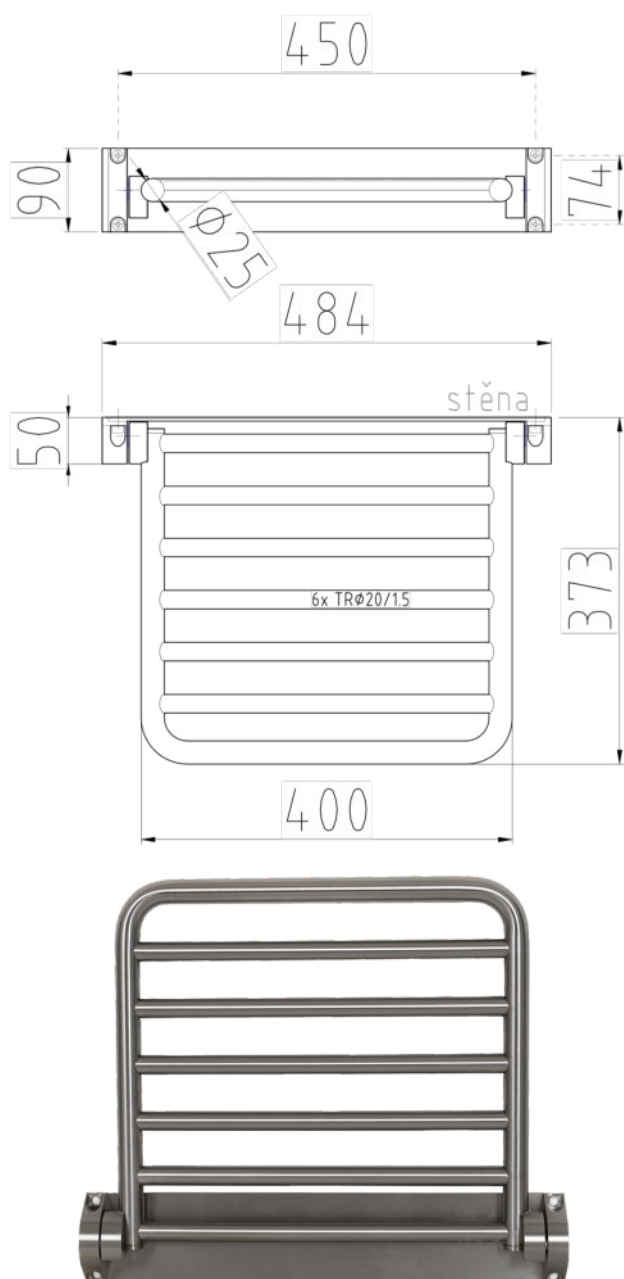

Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 373 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Self-Return

Model 4 – Self-Return Seat



IP Protected

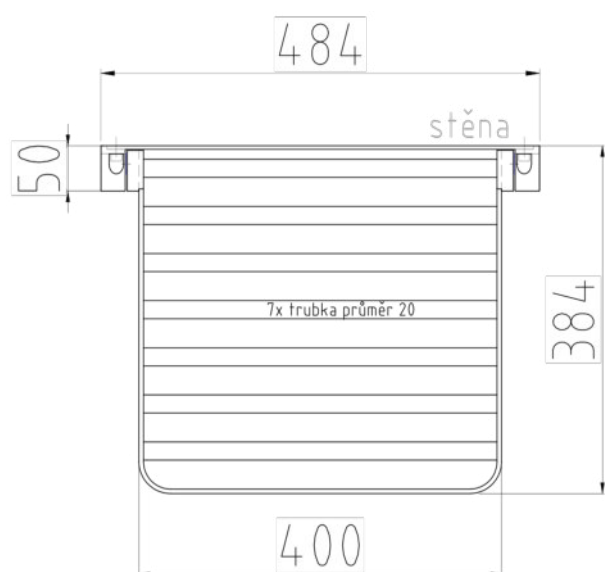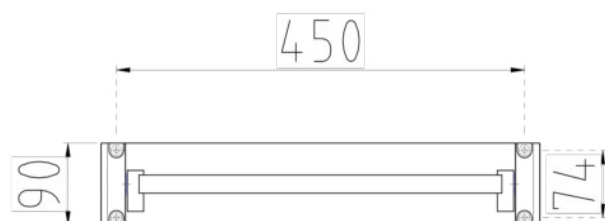

Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 384 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Self-Return

Model 6 – Self-Return Seat



IP Protected

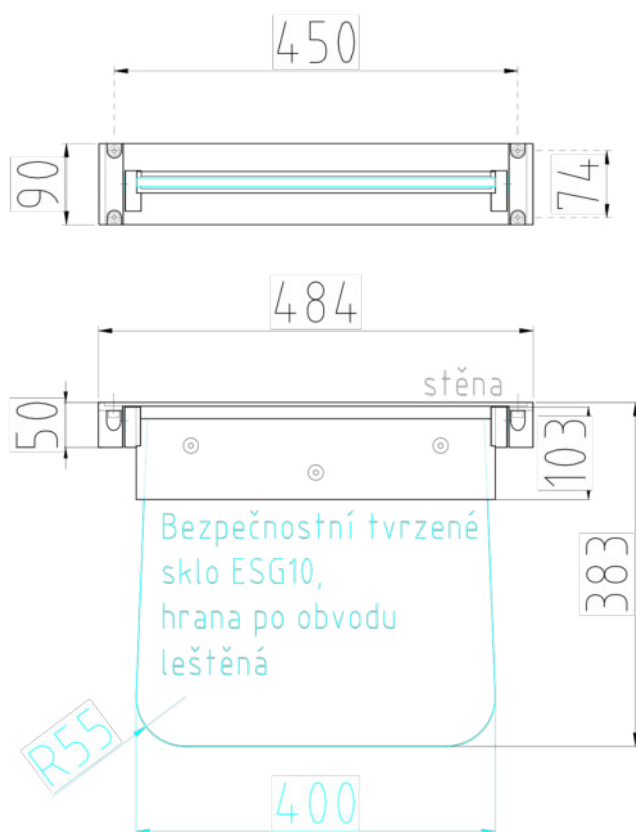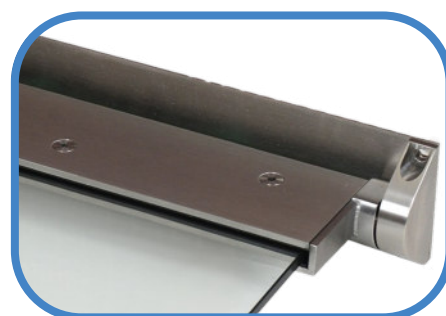

Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 383 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Self-Return
Glass	Tempered safety glass ESG 10, clear or frosted, with polished edges.

Model 7 – Self-Return Seat

IP Protected

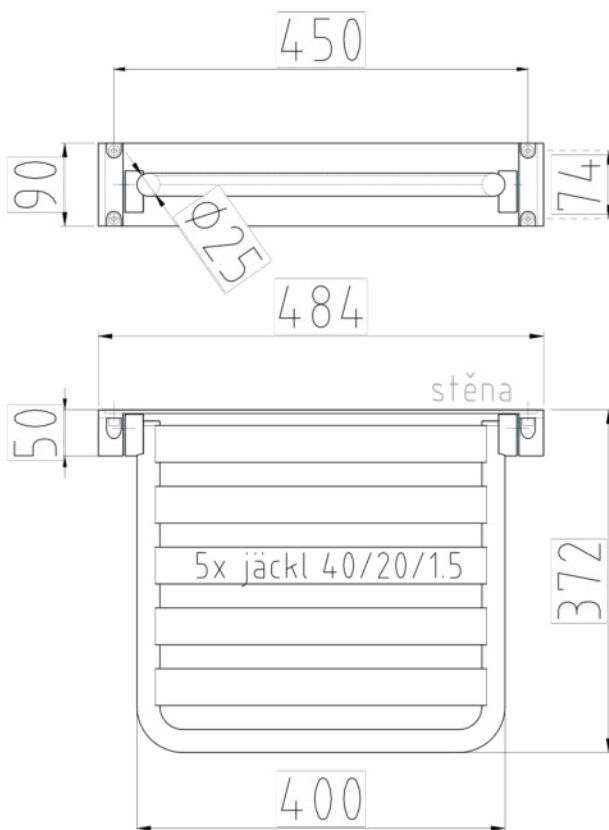
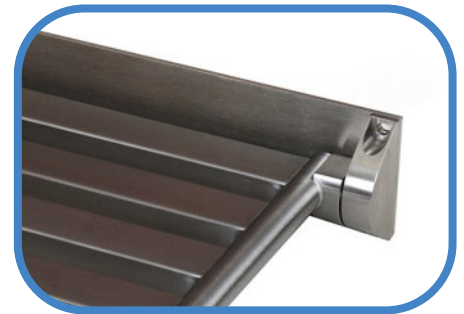


Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	400 x 372 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Self-Return

Seat Options and Customization

Seats with Integrated Handles

IP Protected

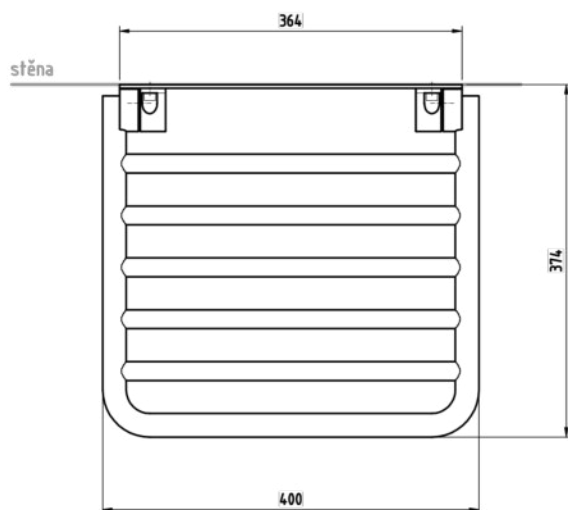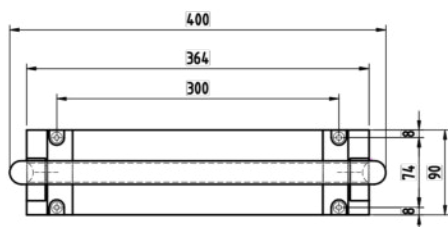

Stainless Steel 1.4301

Capacity 200 kg

Surface Finish	Brushed Stainless Steel
Dimensions	400 x 374 mm
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Manual / Self-Return

Seats for Mobile Suspension Systems

IP Protected




Stainless Steel 1.4301

Capacity 200 kg

Surface Finish	Brushed Stainless Steel
Dimensions	960 x 540mm
Compatibility	by seat type
Steel Mounting Profile	Handle Mounting
Application	Mounted on elevator cabin handrails.

Schéma konstrukce závěsného sedátka

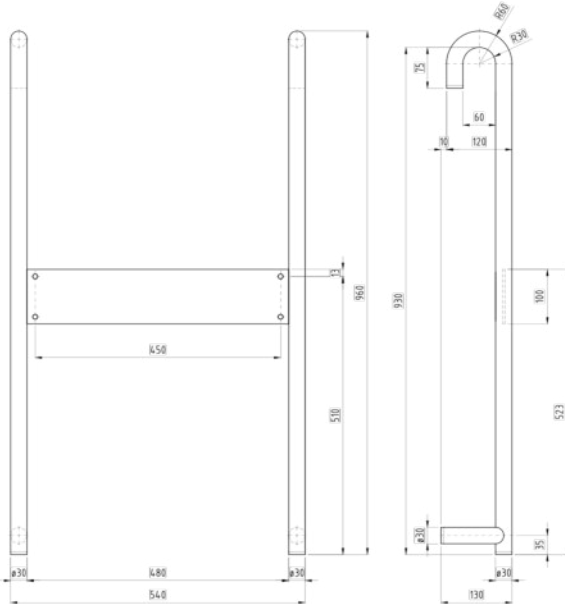


- Nerezová konstrukce pro zavěšení typových sedátek Reming na vnitřní madlo výtahové kabiny
- Konstrukce z nerez TR $\varnothing 30/2$ mm, nerezový materiál třídy AISI304 s povrchovou úpravou kartáč
- trubky zaslepeny černou plastovou zálepkou

Revize 02

- Suitable for all manual folding seat models except ALT 5

Powder-Coated Seats

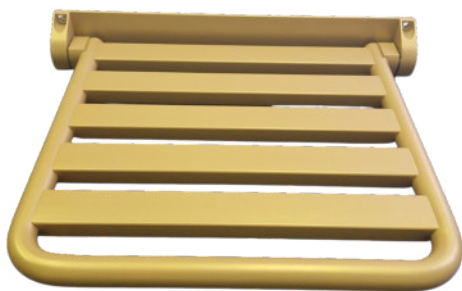

IP Protected



Stainless Steel 1.4301	
Powder-Coated	
Capacity 200 kg	
Surface Finish	Powder-Coated
Dimensions	By model
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	Washer M8 - 4 pcs M8 x 40 A2 - 4 pcs Nut M8 - 4 pcs
Folding Type	Manual / Self-Return

Available in any RAL color upon request

Antivandal Seats



IP Protected



Stainless Steel 1.4301	
Capacity 200 kg	
Surface Finish	Brushed Stainless Steel
Dimensions	By model
Weight	6 kg
Standards	ČSN EN 81 – 70 EN 81-70 : 2018 ČSN 73 4001
Steel Mounting Profile	2 pcs L 50 x 30 x 4 x 2 240 mm
Fasteners	M8 × 40 A2 bolts – 4 pcs (permanently welded) M8 nuts – 4 pcs Lock nuts – 4 pcs
Folding Type	Manual / Self-Return

Welded round-head bolts can only be accessed from the elevator shaft, preventing seat removal from inside the cabin. Designed for high-risk vandalism environments.

Certificates

CERTIFICATE



Strojírenský zkušební ústav, s.p.
Hudcova 424/56b, 621 00 Brno, Česká republika
Certifikační orgán certifikující produkty

CERTIFIKÁT

Číslo: **B-02222-25**

Revize č.: **0**

vydaný výrobcí:

REMING, spol. s r.o.
Kytnerova 22/18
621 00 Brno - Medlánky
Česká republika

Identifikační číslo:

13691228

Výrobky:

Sklopná nerezová sedátka

Typové označení:

alternativa 1, alternativa 2, alternativa 3,
alternativa 4, alternativa 6, alternativa 7

Strojírenský zkušební ústav, s.p. (SZÚ), potvrzuje, že provedl s vyhovujícím výsledkem počáteční zkoušku typu výše uvedených výrobků v souladu s požadavky uvedenými v § 7 odst. 2 nařízení vlády č. 163/2002 Sb., kterým se stanoví technické požadavky na vybrané stavební výrobky, ve znění nařízení vlády č. 312/2005 Sb., nařízení vlády č. 215/2016 Sb. a nařízení vlády č. 119/2024 Sb.

Použité normativní dokumenty:

stavební technické osvědčení č.: 202-STO-B-01982-25 ze dne 2025-11-25 s platností omezenou do 2028-11-30.

Použité certifikační schéma:

SZÚ-1a:2020.00 (vychází ze schématu 1a ISO/IEC 17067, založeno na zkoušení a inspekci).

Certifikát byl vydán na základě závěrečného protokolu o počáteční zkoušce typu č. 30-18106/MZ ze dne 2025-11-28, vystavený SZÚ. Závěrečný protokol obsahuje závěry posouzení a údaje pro identifikaci výrobku.

Certifikát platí **do 2028-11-30** za předpokladu, že jeho držitel neporuší pravidla pro nakládání s certifikátem.

Tento certifikát nenahrazuje příslušný dokument vydaný autorizovanou osobou.

Pravidla pro nakládání s certifikátem jsou uvedena na 2. straně.

Platnost od: 2025-11-28



Digitálně podepsal
Ing. Aleš Onderek
Datum: 2025.12.01
06:22:20 +01'00'

Ing. Aleš Onderek
vedoucí certifikačního orgánu

B-02222-25
0

Strana 1 / 2

SC-2018-000033 v2.7
(F 03-008 v3.1)
NV163 §7

Strojírenský zkušební ústav, s.p., Hudcova 424/56b, 621 00 Brno, Česká republika, www.szutest.cz

Technical Approval Certificate



Strojírenský zkušební ústav, s.p., autorizovaná osoba 202
Hudcova 424/56b, Medlánky, 621 00 Brno, Česká republika

Rozhodnutí o autorizaci č. 2/2023 ze dne 1. 3. 2023

STAVEBNÍ TECHNICKÉ OSVĚDČENÍ

číslo: **202-STO-B-01982-25**

výrobky: Sklopná nerezová sedátka
typové označení: alternativa 1, alternativa 2, alternativa 3,
alternativa 4, alternativa 6, alternativa 7
výrobce: REMING, spol. s r.o.
Kytnerova 22/18
621 00 Brno - Medlánky
Česká republika
identifikační číslo: 13691228

Autorizovaná osoba 202 vydává toto stavební technické osvědčení v souladu s ustanovením § 12 zákona č. 22/1997 Sb., o technických požadavcích na výrobky a o změně a doplnění některých zákonů, ve znění pozdějších předpisů, a § 2 a 3 nařízení vlády č. 163/2002 Sb., kterým se stanoví technické požadavky na vybrané stavební výrobky, ve znění nařízení vlády č. 312/2005 Sb., nařízení vlády č. 215/2016 Sb. a nařízení vlády č. 119/2024 Sb.

Tímto dokladem výše uvedená autorizovaná osoba vymezuje technické vlastnosti výrobků ve vztahu k základním požadavkům na stavby podle toho, jakou úlohu mají výrobky ve stavbě plnit.

Technické údaje jsou uvedeny na následujících stranách, které jsou nedílnou součástí tohoto stavebního technického osvědčení.

Stavební technické osvědčení bylo vydáno k zakázce evid. č. 30-18106.

Stavební technické osvědčení platí **do 2028-11-30**, trvají-li skutečnosti, za kterých bylo vydáno.

Bez písemného souhlasu autorizované osoby se nesmí tento dokument reprodukovat jinak než celý.

Zpracovatel tohoto stavebního technického osvědčení: Bc. Lukáš Blaha.

V Brně dne 2025-11-25




Ing. Aleš Onděrek
představitel autorizované osoby

202-STO-B-01982-25 Strana 1 (4)

Strojírenský zkušební ústav, s.p., Hudcova 424/56b, 621 00 Brno, Česká republika, www.szutest.cz

Seat Specifications

Identifikace a popis výrobku, vymezení způsobu použití výrobku ve stavbě:

Sklopná nerezová sedátka alternativa 1, alternativa 2, alternativa 3, alternativa 4, alternativa 6 a alternativa 7, jsou určena pro osoby s omezenou schopností pohybu a orientace do sprchových koutů, koupelen, výtahů a mají mnoho dalších využití. Sedátka jsou vyrobena z nerezové oceli třídy AISI 304 (1.4301) a jsou vyráběna v pěti alternativách s naprosto totožným systémem sklápění. U alternativy 6 je sedací plocha tvořena bezpečnostním tvrzeným sklem ESG10 o tloušťce 10 mm. Sklopný kloub je zkonstruován, tak aby nemohlo nikde dojít k úrazu v podobě skřípnutí prstů, zachycení oděvu a dalším nepříjemnostem. K připevnění ke stavební konstrukci slouží kotevní deska opatřená po obvodu čtyřmi otvory.

Technické vlastnosti výrobku ve vztahu k základním požadavkům na stavby:

Zákl. pož. č.	Sledovaná vlastnost	Způsob zjištění	Požadovaná úroveň
1 Mechanická odolnost a stabilita			
1.1	Materiály	Ověření na základě předložené technické dokumentace.	Materiály musí být vhodné pro předpokládané použití výrobku.
2 Požární bezpečnost			Základní požadavek se na výrobek nevztahuje.
3 Hygiena, ochrana zdraví a životního prostředí			Základní požadavek se na výrobek nevztahuje.
4 Bezpečnost a přístupnost při užívání			
4.1	Pevnost při statickém namáhání (vertikálním)	Ověření statickým zatížením vzorku. Působíště vertikální síly ve středu výrobku u sklopného v nejméně příznivém místě.	Zkoušený vzorek se nesmí poškodit za působení vertikální síly 2 kN působící po dobu 20 min.
4.2	Pevnost při statickém namáhání (horizontálním)	Ověření statickým zatížením vzorku. Působíště horizontální síly ve středu výrobku u sklopného v nejméně příznivém místě.	Zkoušený vzorek se nesmí poškodit za působení horizontální síly 1 kN po dobu 20 min.
4.3	Funkčnost aretace	Ověření statickým zatížením vzorku. Působíště vertikální síly ve středu výrobku u sklopného v nejméně příznivém místě.	Při působení síly 1 kN nesmí dojít k uvolnění aretace.
4.4	Průvodní dokumentace	Ověření na základě předložené průvodní dokumentace.	Průvodní dokumentace musí obsahovat pokyny pro instalaci a bezpečné užívání výrobku.
5 Ochrana proti hluku			Základní požadavek se na výrobek nevztahuje.
6 Úspora energie a tepla			Základní požadavek se na výrobek nevztahuje.
7 Udržitelné využívání přírodních zdrojů			Základní požadavek se na výrobek nevztahuje.



REMING[®] spol. s r.o.

Kovovýroba | Hliníková okna | Sedátka do výtahů